



Studio Condenser Microphone

Marshall Electronics

Professional Audio Division
Phone: 310-333-0606
800-800-6608 Fax: 310-333-0688
www.mxlmics.com sales@mxlmics.com

Thank you for purchasing the **MXL 910** large diaphragm condenser microphone. With proper care, this mic will provide many years of satisfaction. For best results, please take a few moments to review this literature.

Enjoy your microphone!

The MXL Team

General Characteristics

The 910 microphone has a 6-micron gold-sputtered diaphragm and a cardioid pickup pattern. Condenser microphones are very sensitive, readily revealing very subtle sonic details. They also tend to pick up sounds outside the pattern more than some designs, which can lead to powerful feedback if you are not careful. We strongly advise experimentation with placement and isolation requirements with the gain initially set low to avoid equipment (and hearing) damage.

Contents

Unpack your MXL 910 microphone carefully and verify that all of the following items are included:

- MXL 910 microphone
- Hard mount mic stand adapter
- MXL Microfiber cleaning cloth

If any of these items are missing or damaged, contact the company from which you purchased the microphone.

Power Requirement

IMPORTANT - This unit requires phantom power at 48 volts, \pm 4 volts. Each unit has been thoroughly checked before shipping, so if you do not hear sound, check that the phantom power on your mixer or separate power supply is switched on.

Microphone Cable


This microphone connects to a mixer or preamp via XLR cable (not included). The microphone cable can have a profound effect on the sound of any microphone. Even the finest microphones will sound poor if the interconnect cable allows noise to enter, or causes distortion and loss of information. Use only the best microphone cable your budget will allow. We recommend Mogami cable for the best results.

Care

Dust and foreign material can degrade the performance of a microphone over time so always store the unit in its case. For vocals closer than 3", use a pop filter or a foam windscreen to avoid getting moisture on the diaphragm as this can substantially degrade the microphone's performance. Store the microphone in its original packaging in a cool, dry place along with the included packet of silica gel. These steps will help keep the mic in proper working order and sounding its best for many years to come.

Specifications

Туре	Pressure gradient condenser mic
Diaphragm	Gold-sputtered, 6 micron diaphragm
Frequency Range	30 Hz—20 kHz
Polar Pattern	Cardioid
Capsule Size	22 mm/1.26 in.
Impedance	200 ohms
Equivalent Noise Level	20 dBA (A-weighted IEC 651)
Power Requirements	48V phantom power (± 4V)
Weight	0.75lb/340g
Size	47mm x 168mm/1.85in. x 6.60 in.
Metal Finish	Metallic Silver

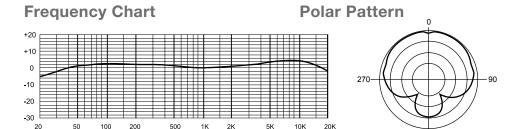

Warranty

Marshall microphones are guaranteed against defects in material and workmanship for one year from the date of purchase. Should you encounter any problem with this unit, promptly contact the company you purchased it from for assistance. The original dated sales receipt will be necessary for any warranty claim. Do not send any unit directly to us without prior authorization from our service department. Warranty coverage is limited to repair or replacement (at our option) of the microphone, and does not cover incidental damages due to use of this unit, nor damage caused by accidental misuse of this product.